



AVIATION WHEEL CHOCKS

For use with Aviation Vehicles and Equipment

FEATURES

- Impact-absorbing urethane
- Weather and abrasion resistant
- High load-bearing capacity
- Resistant to aircraft fuels, oils, and lubricants
- Eliminates Foreign Object Damage
- Optional anti-skid rubber pads for polished hanger floors

MONSTER® AVIATION WHEEL CHOCKS include the AC Series, made of highly durable, lightweight polyurethane. AC Chocks last longer than wood chocks, never need painting and eliminate Foreign Object Damage threats for aircraft. The AC Series is ideal for private, commercial, cargo and military aircraft.


CUSTOMIZE YOUR CHOCKS

6800, 4600, and 3500 Series Aviation Wheel Chocks can be customized to reflect your company's unique identity with a special color or adding your logo on the chock.



- Lightweight and easy to use
- Will not rot, crack or splinter like wood
- Rope-lock system
- Optional rope carrying handle
- Molded-in high-visibility yellow color



AC6800 SERIES - for large and oversized aircraft

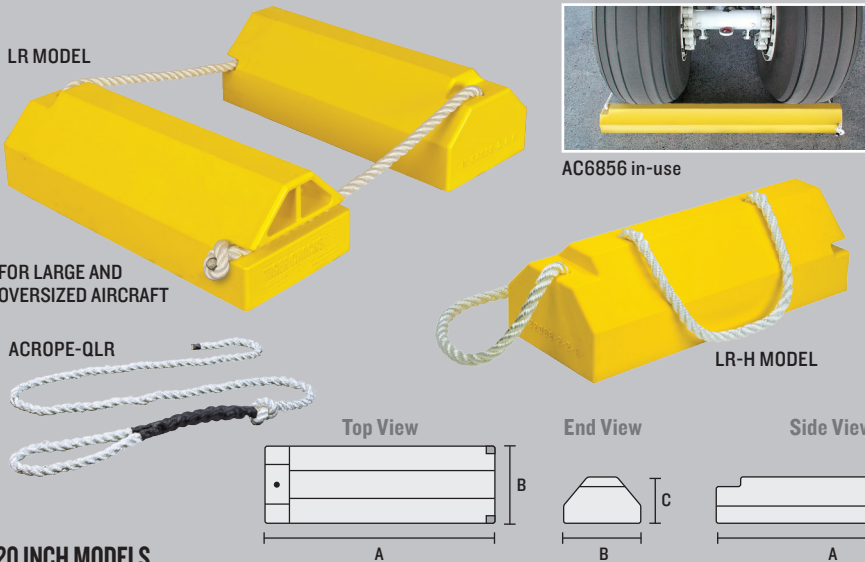

ROPE LOCK SYSTEM The original military style chock-to-chock rope lock system allows a wheel chock to be temporarily and securely attached to the opposing wheel chock on the opposite side of the aircraft tire. This chock-locking system ensures that wheel chocks remain firmly positioned against each side of the aircraft tire during engine test procedures.

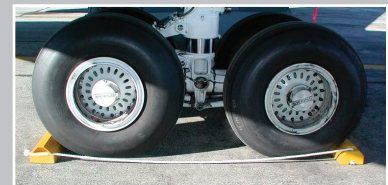

AC6856 in-use

20 INCH MODELS

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT	COLOR
AC6820-LR	Aviation Chock with 36" Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	13.9 lb. (6.3 kg)	Hi-Vis Yellow
AC6820-QLR	Aviation Chock with 72" Looped Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	14.4 lb. (6.5 kg)	Hi-Vis Yellow
AC6820-LR-H	Aviation Chock with Carrying Handle and 36" Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	14.05 lb. (6.4 kg)	Hi-Vis Yellow
AC6820-QLR-H	Aviation Chock with Carrying Handle and 72" Looped Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	14.55 lb. (6.6 kg)	Hi-Vis Yellow
AC6820-LR-RP	Aviation Chock with Rubber Pad and 36" Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	18.9 lb. (8.6 kg)	Hi-Vis Yellow
AC6820-QLR-RP	Aviation Chock with Rubber Pad and 72" Looped Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	19.4 lb. (8.8 kg)	Hi-Vis Yellow
AC6820-LR-RP-H	Aviation Chock with Carrying Handle, Rubber Pad and 36" Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	19.05 lb. (8.6 kg)	Hi-Vis Yellow
AC6820-QLR-RP-H	Aviation Chock with Carrying Handle, Rubber Pad and 72" Looped Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	19.55 lb. (8.9 kg)	Hi-Vis Yellow
ACROPE-36X5/8	Replacement Locking Rope for AC6820	36 in. (91.4 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	36 in. (91.4 cm)	.25 lb. (.11 kg)	White
ACROPE-QLR	Replacement Looped Locking Rope for AC6820	72 in. (183 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	72 in. (183 cm)	.5 lb. (.23 kg)	White
ACPAD-6820	Replacement Rubber Pad for AC6820	17.25 in. (43.8 cm)	7.4 in. (18.8 cm)	.5 in. (1.3 cm)	N/A	5.0 lb. (2.3 kg)	Black

56 INCH MODELS

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT	COLOR
AC6856-LR	Aviation Chock with 48" Locking Rope (no Rubber Pad)	56 in. (142.2 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	48 in. (122 cm)	36.25 lb. (16.4 kg)	Hi-Vis Yellow
AC6856-LR-RP	Aviation Chock with Rubber Pad and 48" Locking Rope	56 in. (142.2 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	48 in. (122 cm)	43.25 lb. (19.7 kg)	Hi-Vis Yellow
ACROPE-48X5/8	Replacement Locking Rope for AC6856	48 in. (122 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	48 in. (122 cm)	.35 lb. (.16 kg)	White
ACPAD-6856	Replacement Rubber Pad for AC6856	7.5 in. (19 cm)	5.6 in. (14.2 cm)	.5 in. (1.3 cm)	N/A	1.0 lb. (.5 kg)	Black