


StartPave Stone or Gravel Filling



Installation Notes

- Subbase can be increased to accommodate greater storm water retention.
- For optimal ADA / high heel compliance, surface grid should be filled with 3/8" aggregate.
- Certain applications may require StartPave Mesh and or Geofabric between subbase and subgrade depending on site and soil requirements.
- Slopes and gradients over 15% may require StartPave to be staked.

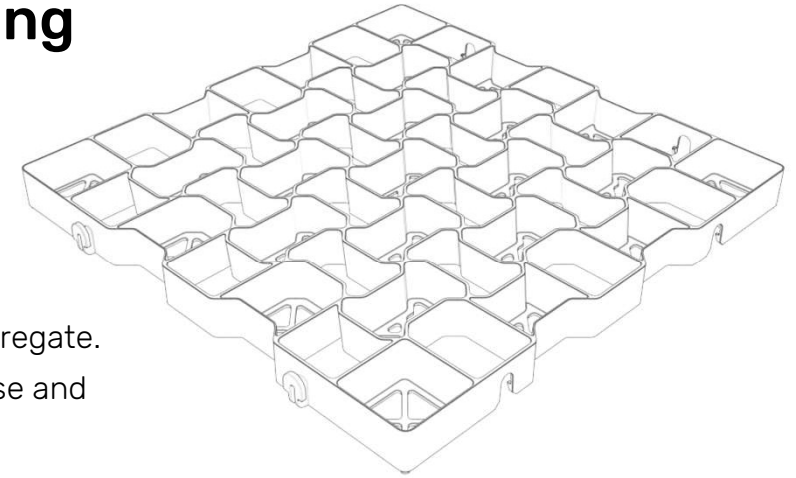