


Tough Trench Fixing

The Tough Trench must be bolted down at all times when being used. These instructions are a basic guide as to how the cover should be fixed to the ground.

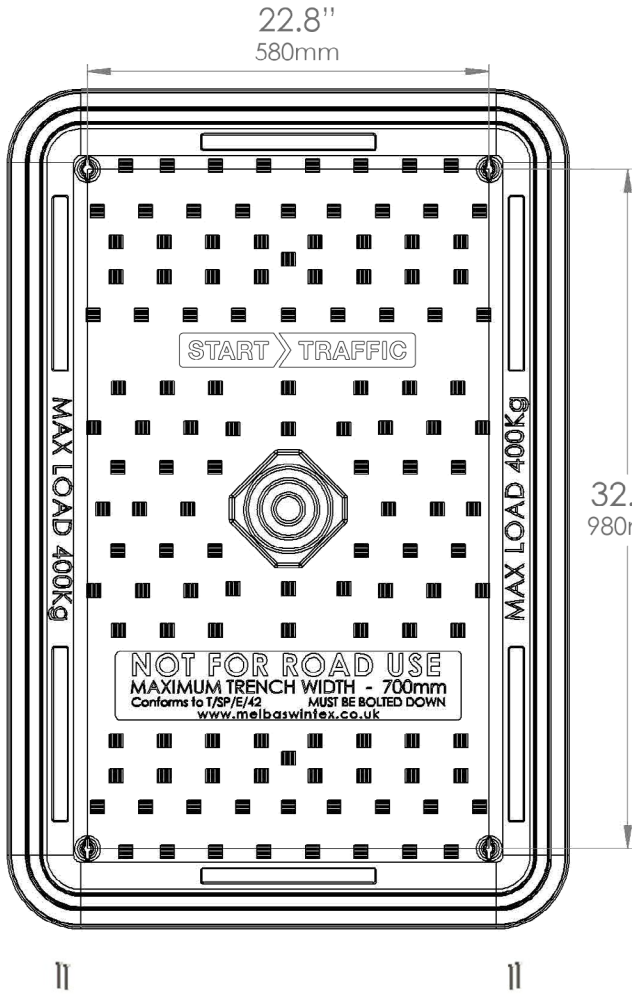

1] Using the dimensions opposite, mark out four holes onto the surface where the cover shall be placed.

2] In each corner, drill holes for at least 1.6" deep. We recommend using 3/8 sized bolts for the appropriate substrate.

3] Place the cover over the recently drilled holes.

4] Secure the cover down by screwing down the bolts in each corner.

5] When the cover is to be removed, unscrew the bolts and store away for future use.

6] Fill in the fixing holes on the ground using a suitable material that matches the fixing surface.

